


*Agrassi Cream***COLOURS:****FINISHES:****SIZES:****AGRASSI CREAM****POLISHED**

CUT TO SIZE BESPOKE TO REQUIREMENTS

SLIP RESISTANCE

Any queries about slip resistance please contact us.

PTV

96 Rubber

55 Rubber

Wet

Dry

Wet

Dry

R Rating

Polished

AOR

AOR

AOR

AOR

AOR

APPLICATION

Agrassi Cream is suitable for:



Heavy Footfall



Interior



Skirting



Stairs

ORDER A FREE SAMPLE

+44(0) 24 7642 2580

Request 100 X 100 sample

design@kinorigo.com

Colour representations on this sheet may not be exact.
Take care when choosing your tiles, make sure you order a sample

Technical Specifications

Norm

Average value

Water absorbtion	TS EN 13755	0,6%
Flexular strength (MOR)	TS EN 12372	18 kg/cm2
Abrasion resistance	EN ISO 10545_6	5.77 cm3


Packaging Information



AGRASSI CREAM AGRASSI-CREAM




AGRASSI CREAM AGRASSI-CREAM

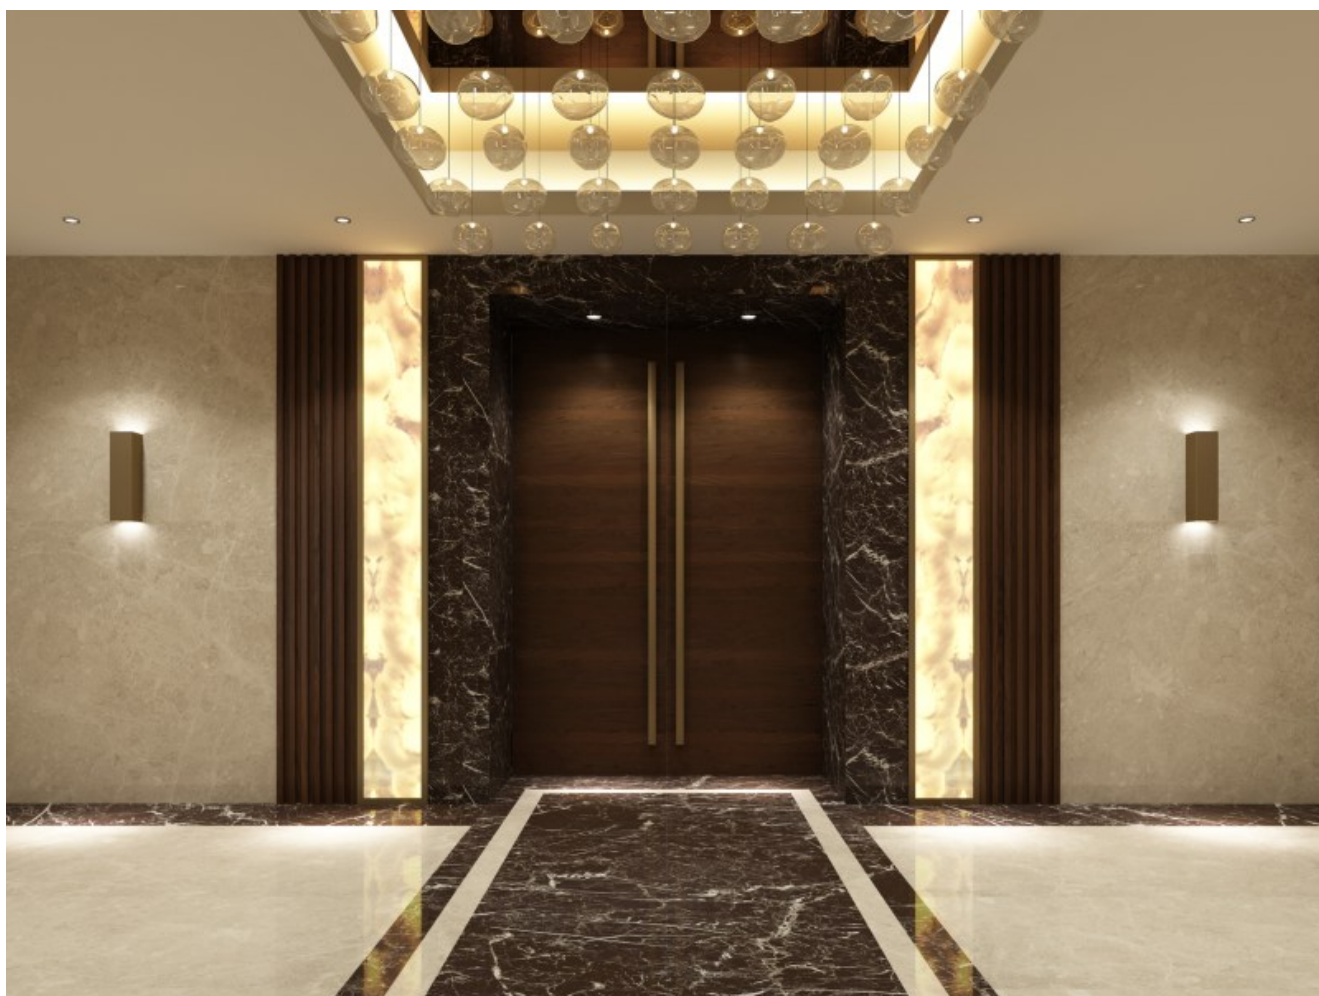

AGRASSI CREAM AGRASSI-CREAM



AGRASSI CREAM AGRASSI-CREAM

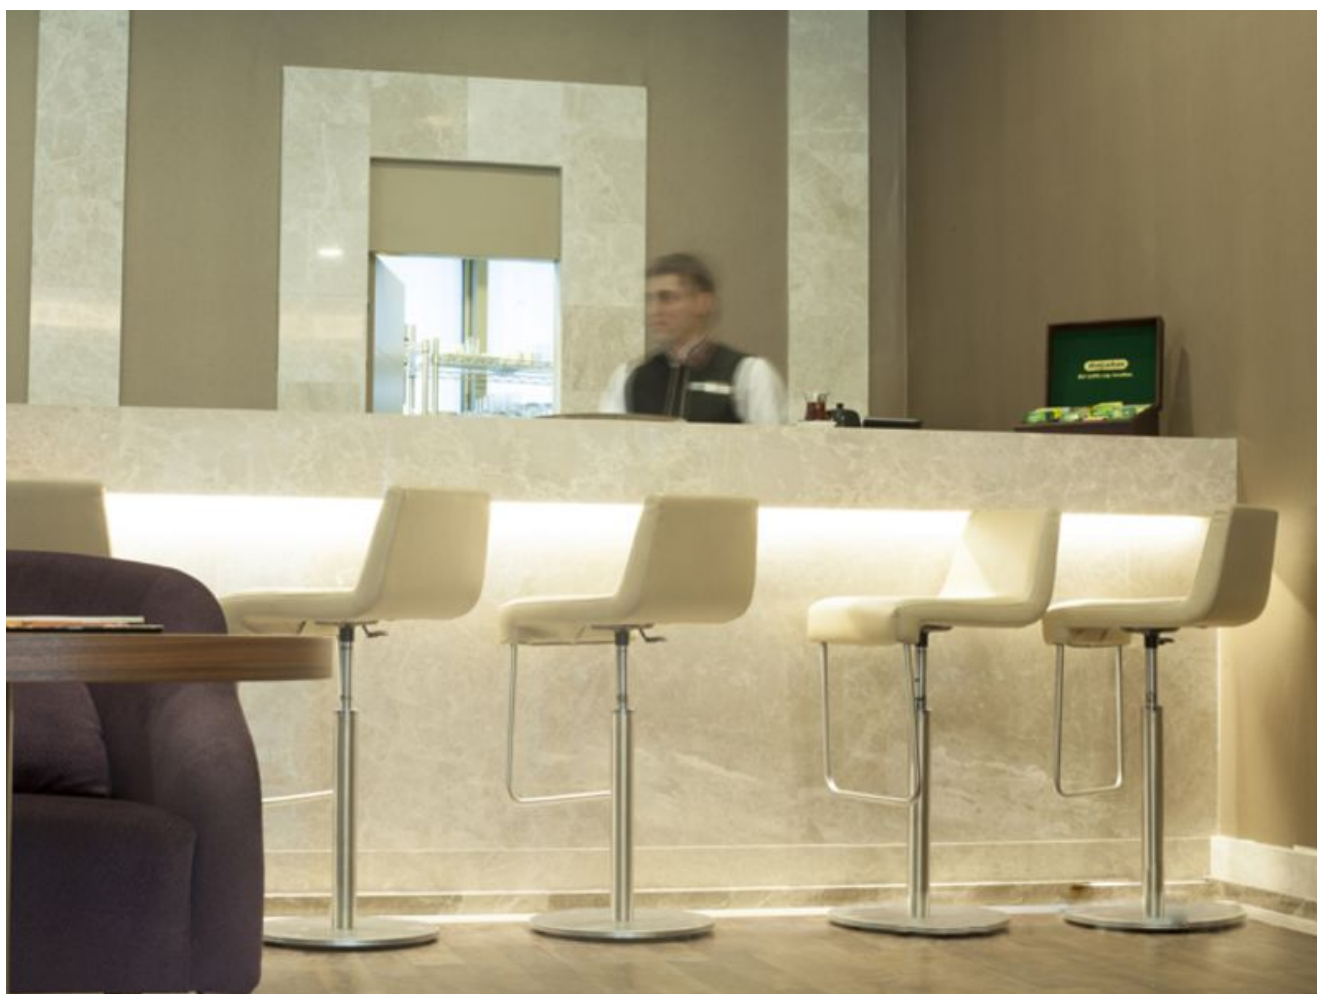

AGRASSI CREAM AGRASSI-CREAM



AGRASSI CREAM AGRASSI-CREAM