

*Lead***COLOURS:****LEAD****FINISHES:****HONED**

300 X RANDOM LENGTH, 400 X 400, 500 X 500, 600 X 300, 600 X 600

HAND-CLEFT

600 X 600, 600 X 300, 500 X 500, 400 X 400, 300 X RANDOM LENGTH

FLAMED

600 X 600, 600 X 300, 500 X 500, 400 X 400, 300 X RANDOM LENGTH

SIZES:**SLIP RESISTANCE**

Any queries about slip resistance please contact us.

PTV

96 Rubber

55 Rubber

Wet

Dry

Wet

Dry

R Rating

KINORIGO

Honed

27

59

17

37

n/a

APPLICATION

Lead is suitable for:



Exterior



Heavy Footfall



Interior



Pool Edgings



Skirting



Stairs



Wet Areas

ORDER A FREE SAMPLE

+44(0) 24 7642 2580

Request 100 X 100 sample

design@kinorigo.com

Colour representations on this sheet may not be exact.
Take care when choosing your tiles, make sure you order a sample

Technical Specifications


Packaging Information



LEAD ALL



LEAD ALL

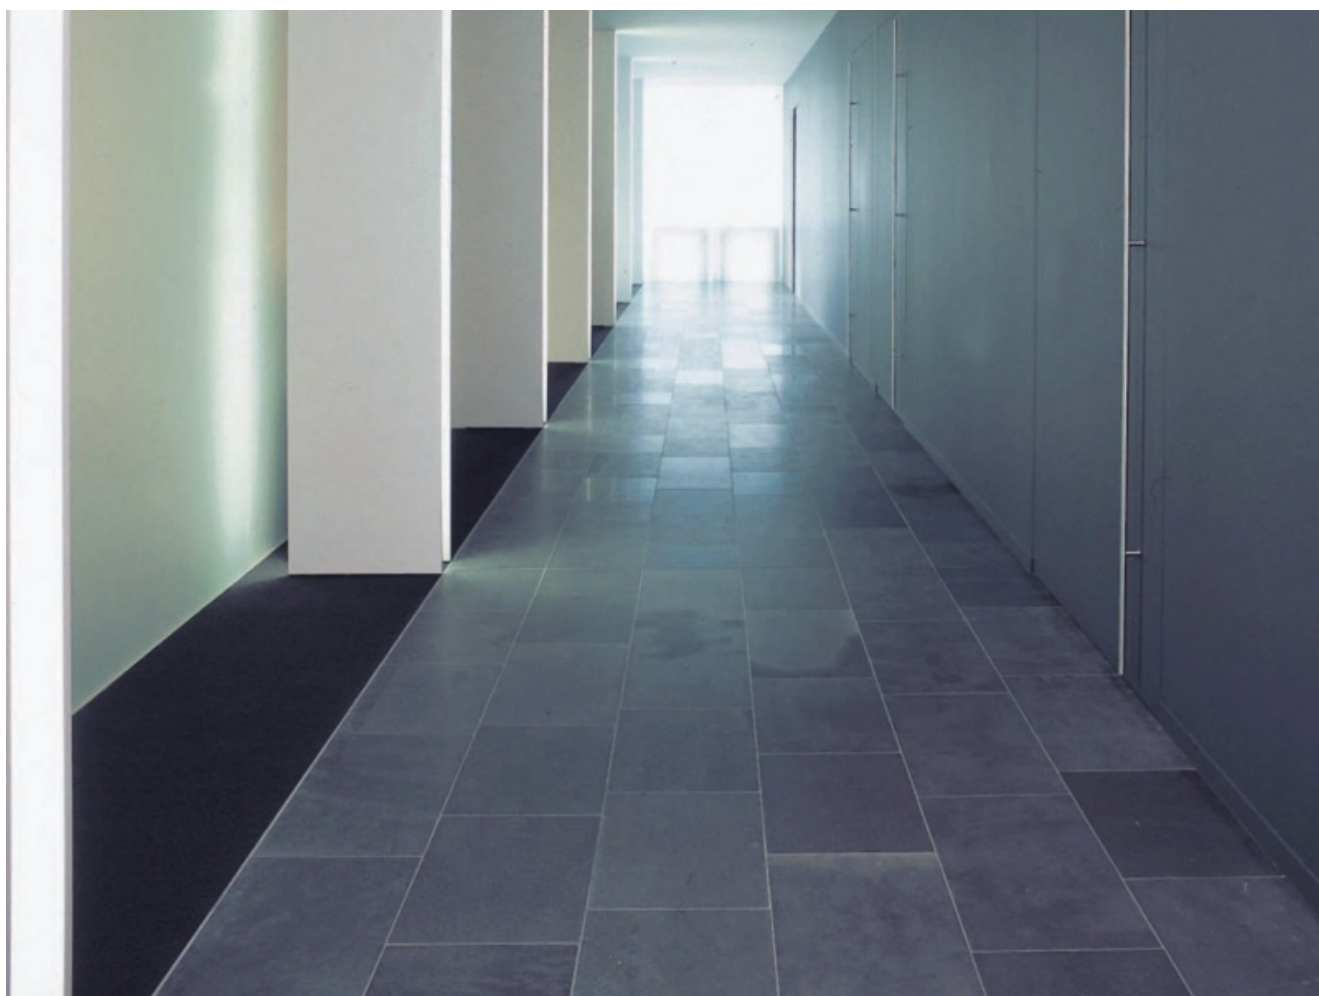

LEAD ALL

