

*Lead***COLOURS:****LEAD****FINISHES:****HONED**

300 X RANDOM LENGTH, 400 X 400, 500 X 500, 600 X 300, 600 X 600

**HAND-CLEFT**

600 X 600, 600 X 300, 500 X 500, 400 X 400, 300 X RANDOM LENGTH

**FLAMED**

600 X 600, 600 X 300, 500 X 500, 400 X 400, 300 X RANDOM LENGTH

**SIZES:****SLIP RESISTANCE**

Any queries about slip resistance please contact us.

PTV

96 Rubber

55 Rubber

Wet

Dry

Wet

Dry

R Rating

KINORIGO  
Honed

27

59

17

37

n/a

**APPLICATION**

Lead is suitable for:



Exterior



Heavy Footfall



Interior



Pool Edgings



Skirting



Stairs



Wet Areas

**ORDER A FREE SAMPLE**

+44(0) 24 7642 2580

Request 100 X 100 sample

design@kinorigo.com

Colour representations on this sheet may not be exact.  
Take care when choosing your tiles, make sure you order a sample

## Technical Specifications


## Packaging Information



LEAD ALL



LEAD ALL

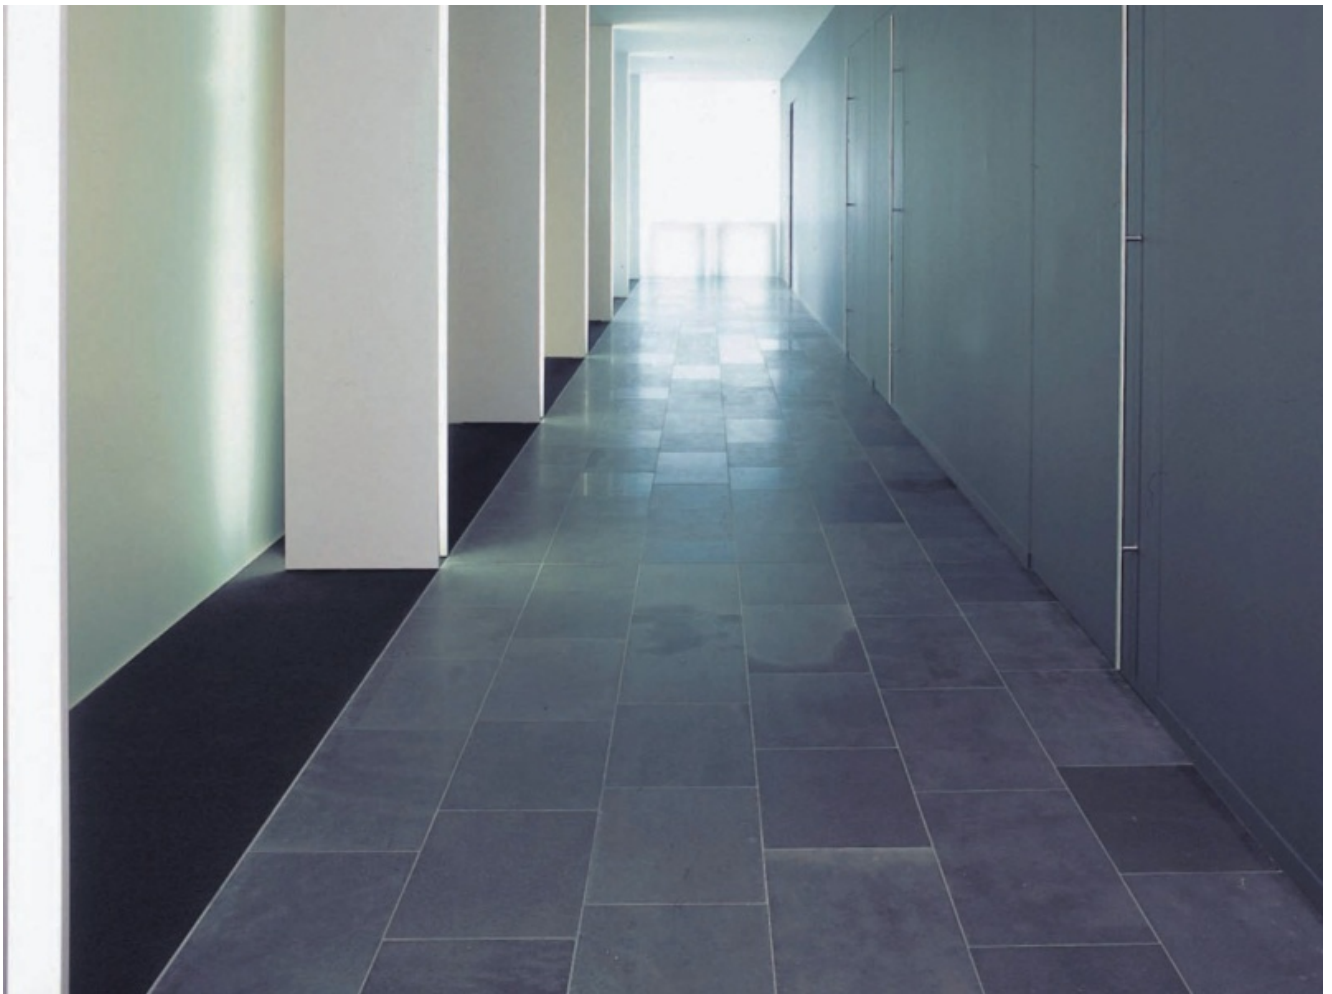

LEAD ALL

