

COLOURS:**CALM****DARK****GREY****FINISHES:****NATURAL**

1200 X 1200 X 6MM, 2400 X 1200 X 6MM

POLISHED

1200 X 1200 X 6MM, 2400 X 1200 X 6MM

NATURAL

1200 X 1200 X 6MM, 2400 X 1200 X 6MM

POLISHED

1200 X 1200 X 6MM, 2400 X 1200 X 6MM

NATURAL

1200 X 1200 X 6MM, 2400 X 1200 X 6MM

POLISHED

1200 X 1200 X 6MM, 2400 X 1200 X 6MM

SIZES:**SLIP RESISTANCE**

Any queries about slip resistance please contact us.

PTV

96 Rubber

55 Rubber

Wet

Dry

Wet

Dry

R Rating

Natural

AOR

AOR

AOR

AOR

R10 A

APPLICATION

Wave is suitable for:



Exterior



Heavy Footfall



Interior



Skirting



Stairs

ORDER A FREE SAMPLE

+44(0) 24 7642 2580

Request 100 X 100 sample

design@kinorigo.com

Colour representations on this sheet may not be exact.
Take care when choosing your tiles, make sure you order a sample

Technical Specifications

	Norm	Average value
Water absorbtion	EN ISO 10545_3	0.04%
Abrasion resistance	EN ISO 10545_6	<128mm ³
Flexular strength (MOR)	EN ISO 10545_4	53 N/mm ²
Slip resistance	DIN 51130	R10 A Nat
Frost resistance	EN ISO 10545_12	YES
Stain resistance	EN ISO 10545_14	YES

Packaging Information

Finish	Size	Pieces/box	Weight/box	Sqm/box	Boxes/pallet	Weight/pallet	Sqm/pallet
Natural/Polished	2400 x 1200 x 6 mm	1	40,00	2,88	20	820	57,60
Natural/Polished	1200 x 1200 x 6 mm	2	42,00	2,88	24	1.028	69,12



WAVE CALM



WAVE CALM




WAVE CALM



WAVE CALM




WAVE CALM

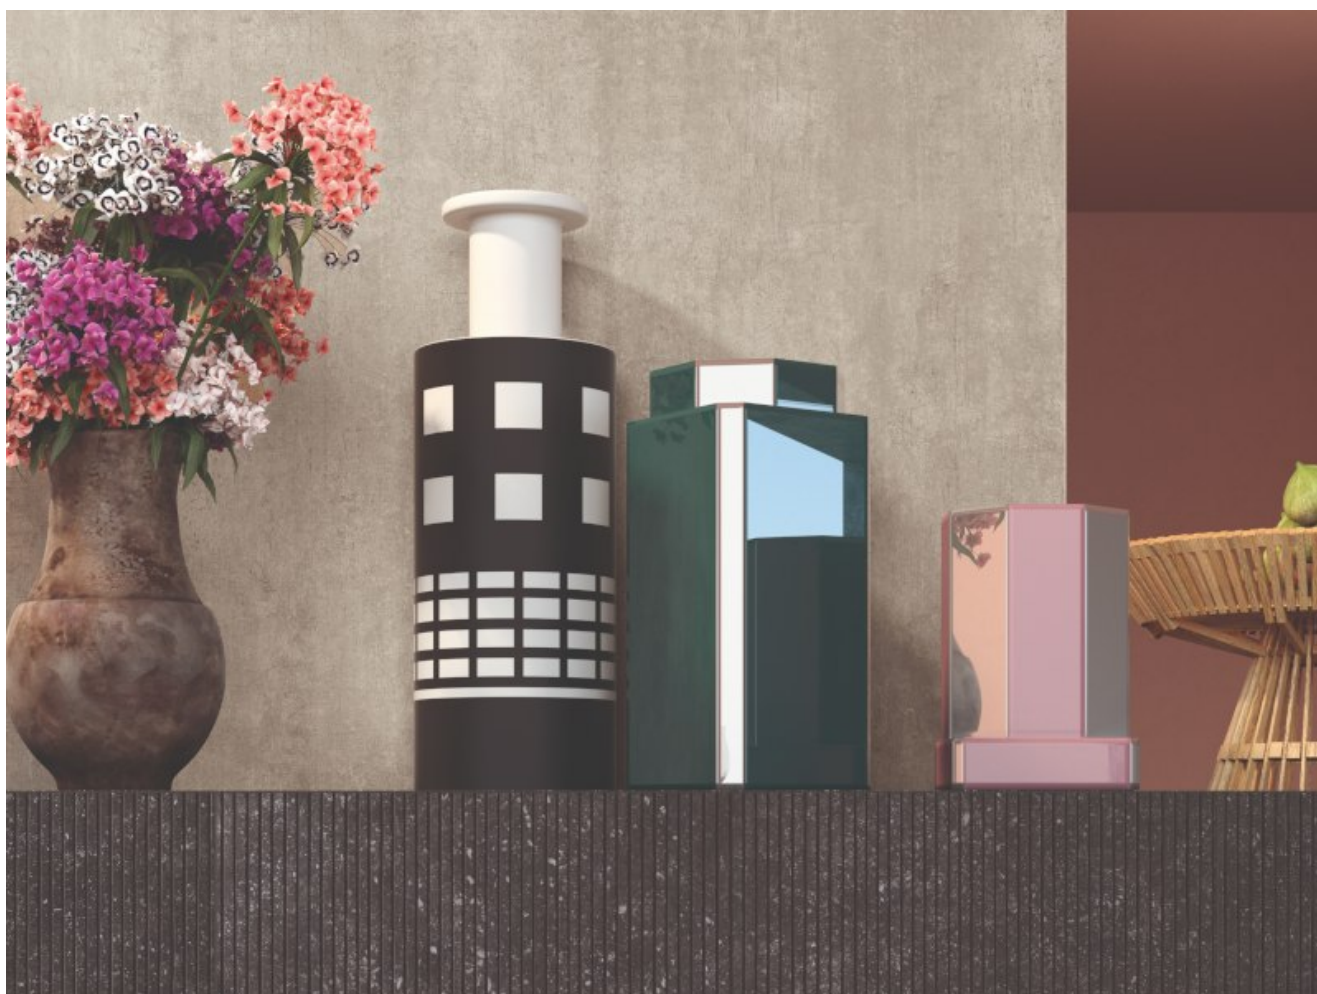

WAVE CALM




WAVE DARK

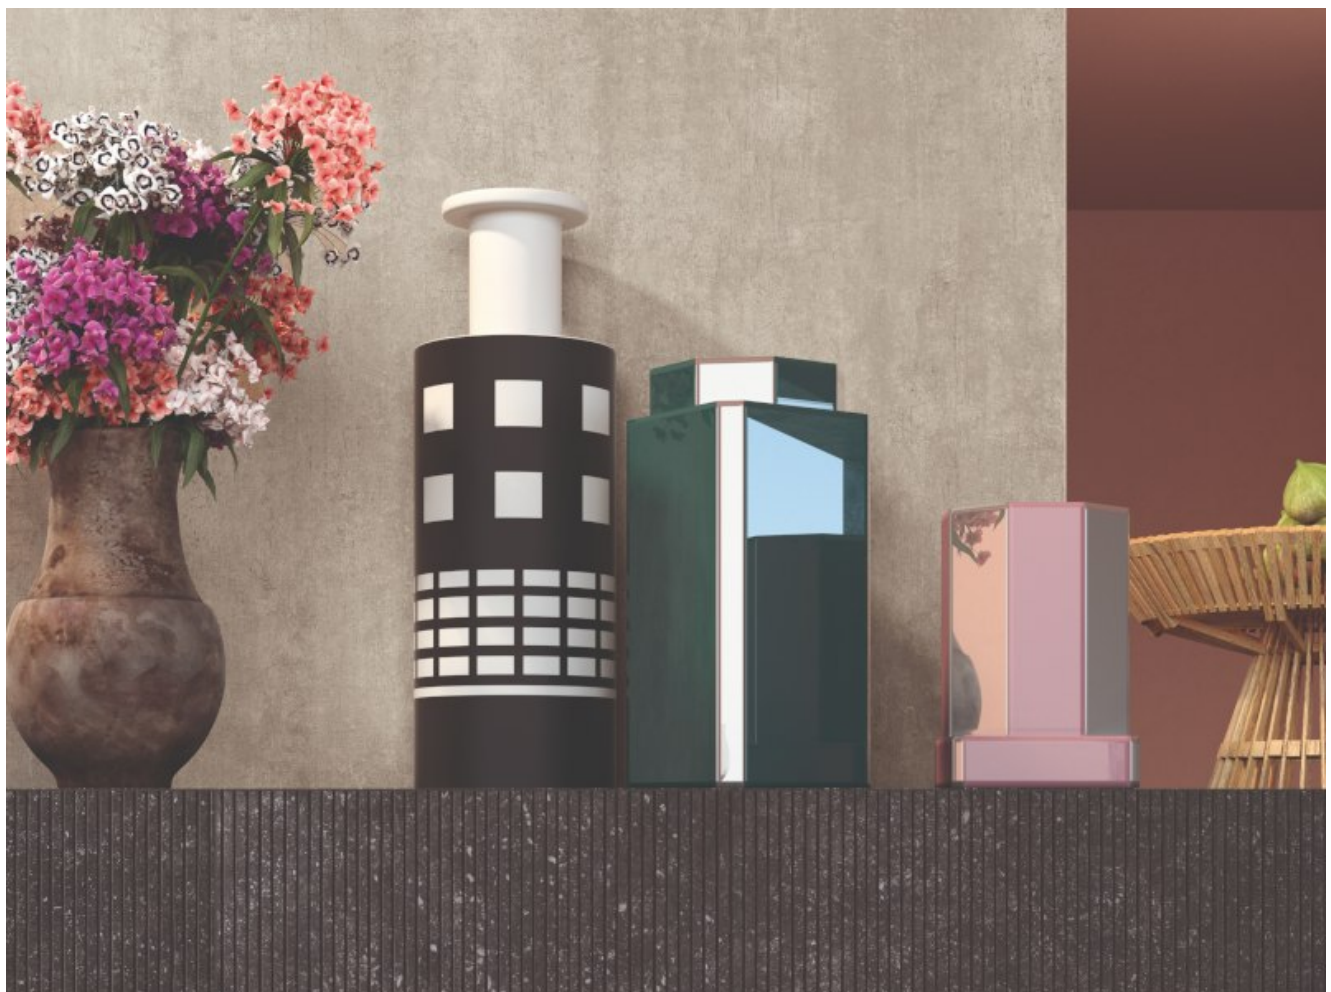

WAVE DARK




WAVE DARK

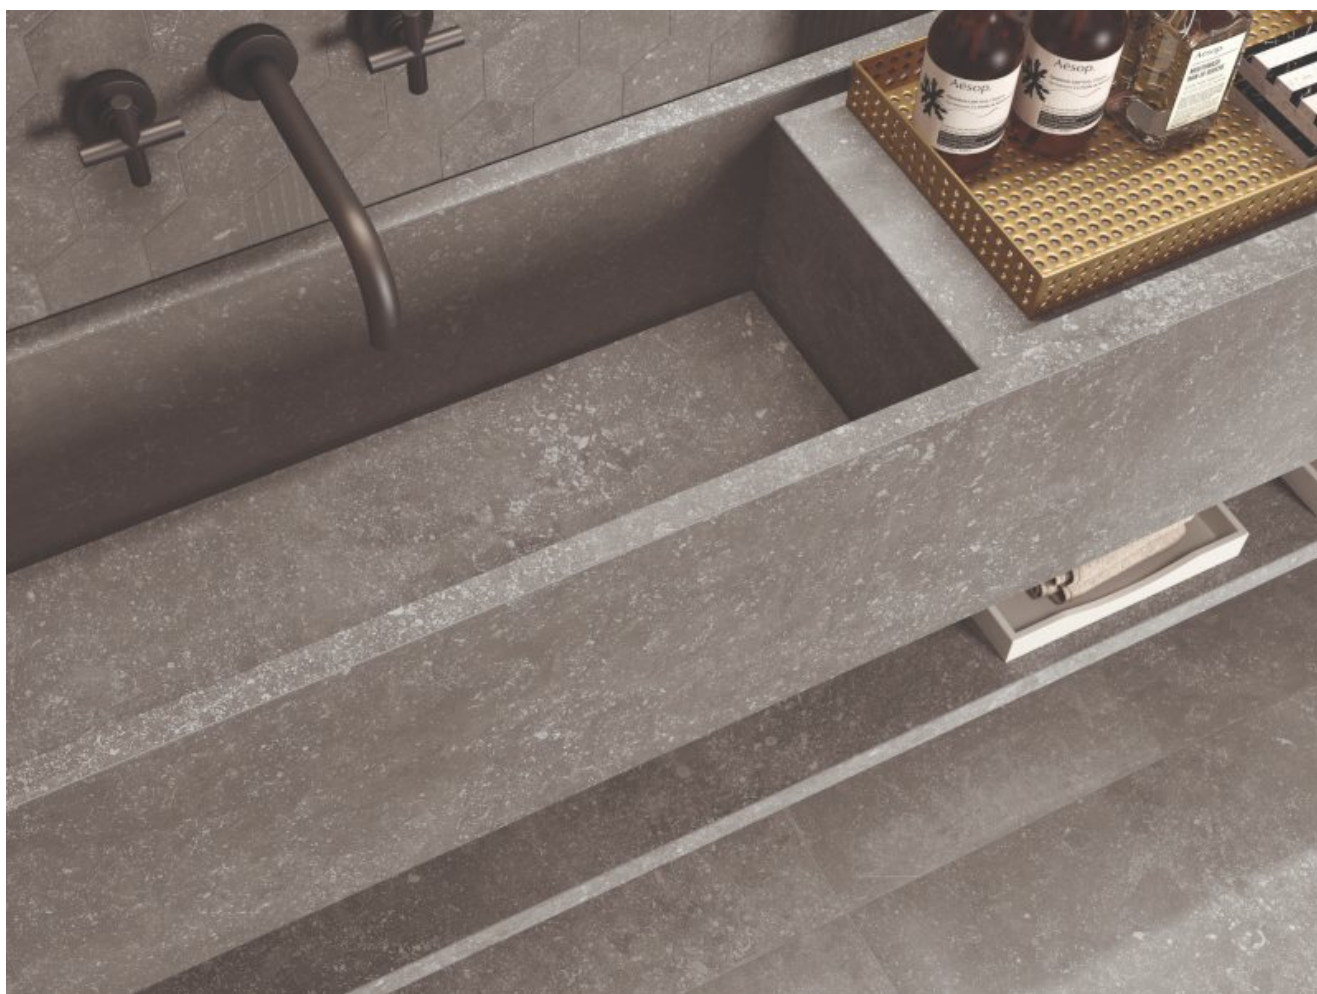

WAVE GREY



WAVE GREY

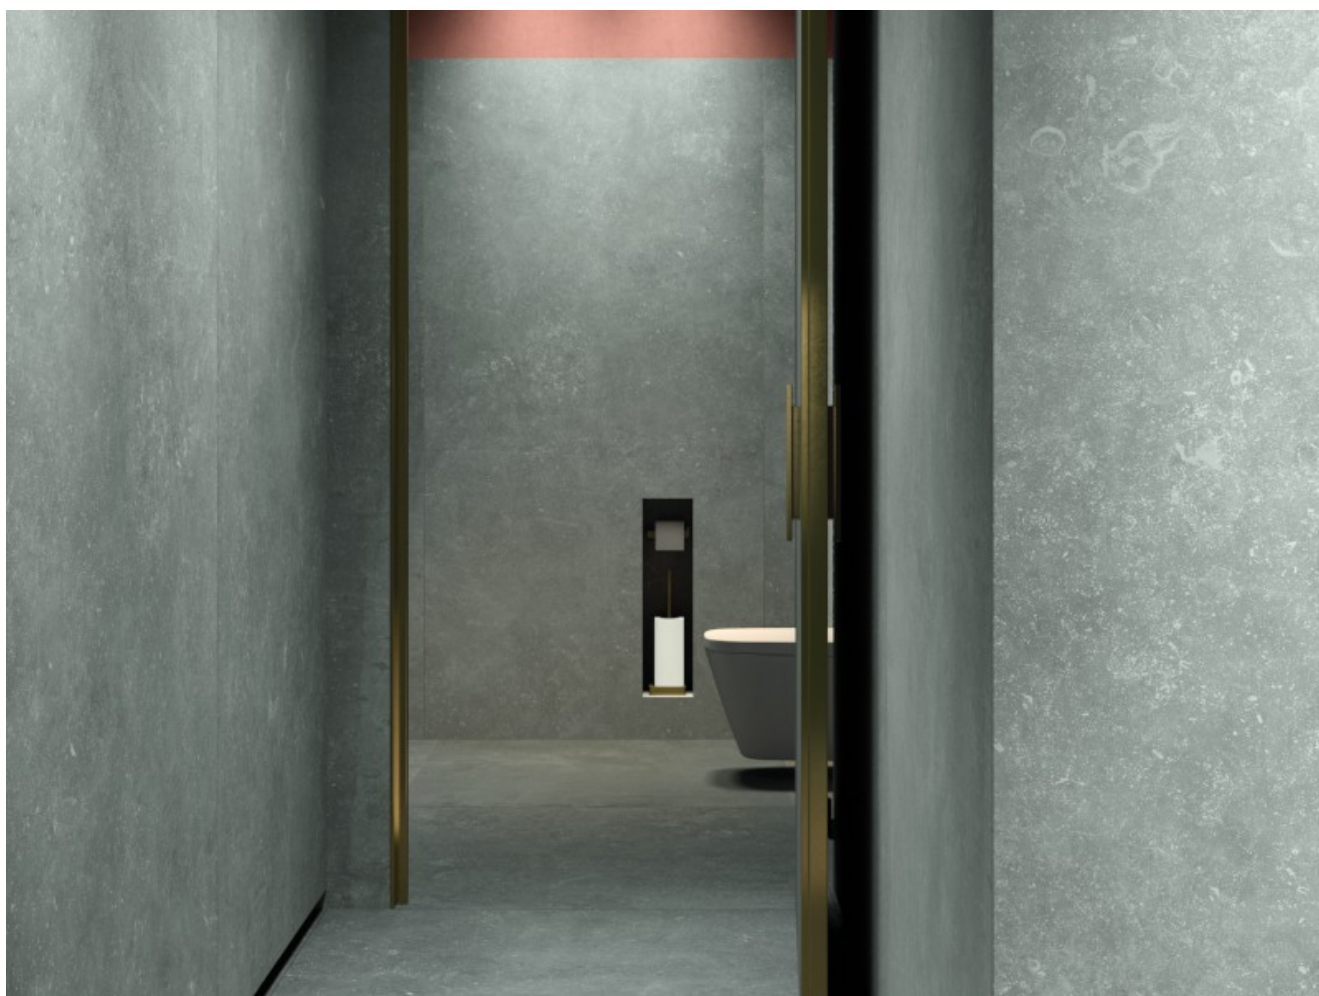

WAVE GREY

