


Absolute Onyx

COLOURS:

FINISHES:


SIZES:



ROSE

POLISHED

750 X 750 X 6MM, 750 X 375 X 6MM, 3000 X 1500 X 6MM, 1500 X 750 X 6MM, 1500 X 1500 X 6MM



RIAJ

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM



PEARL

POLISHED

750 X 750 X 6MM, 1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM

NATURAL

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM




EMERALD

HONED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM



AMBER

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM




GREY

HONED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM



GREEN OPAL

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM



IVORY

HONED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM



ICE

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM



ORO

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM

NATURAL

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM



REAL

POLISHED

1500 X 1500 X 6MM, 1500 X 750 X 6MM, 3000 X 1500 X 6MM, 750 X 375 X 6MM, 750 X 750 X 6MM

SLIP RESISTANCE

Any queries about slip resistance please contact us.

APPLICATION

Absolute Onyx is suitable for:

PTV

96 Rubber

55 Rubber

Wet

Dry

Wet

Dry

R Rating

Natural

AOR

AOR

AOR

AOR

R9

Honed

AOR

AOR

AOR

AOR

R9

Polished

AOR

AOR

AOR

AOR

R9



Exterior



Heavy Footfall



Interior



Skirting



Stairs

ORDER A FREE SAMPLE

+44(0) 24 7642 2580

Request 100 X 100 sample

design@kinorigo.com

Colour representations on this sheet may not be exact.

Take care when choosing your tiles, make sure you order a sample

Technical Specifications

	Norm	Average value
Water absorbtion	EN ISO 10545_3	5 – 8%
Breaking strength	EN ISO 10545_4	1300 N
Flexular strength (MOR)	EN ISO 10545_4	49 N/mm2
Abrasion resistance	EN ISO 10545_6	<140 mm3
Frost resistance	EN ISO 10545_12	YES
Slip resistance	DIN 51130	R9

Packaging Information

Finish	Size	Pieces/Pallet	Weight/pallet	Sqm/pallet
Polished/Honed/Natural	3000 x 1500 x 6mm	12	870,000	54,00
Polished/Honed/Natural	1500 x 1500 x 6mm	48	1602,00	108,00
Polished/Honed/Natural	1500 x 750 x 6mm	52	876,00	58,50
Polished/Honed/Natural	750 x 750 x 6mm	114	954,82	64,13
Polished/Honed/Natural	750 x 375 x 6mm	264	1096,5	74,25



ABSOLUTE ONYX ROSE



ABSOLUTE ONYX ROSE



ABSOLUTE ONYX RIAJ



ABSOLUTE ONYX AMBER



ABSOLUTE ONYX AMBER



ABSOLUTE ONYX ICE



ABSOLUTE ONYX ICE




ABSOLUTE ONYX REAL



ABSOLUTE ONYX GREEN-OPAL




ABSOLUTE ONYX GREEN-OPAL

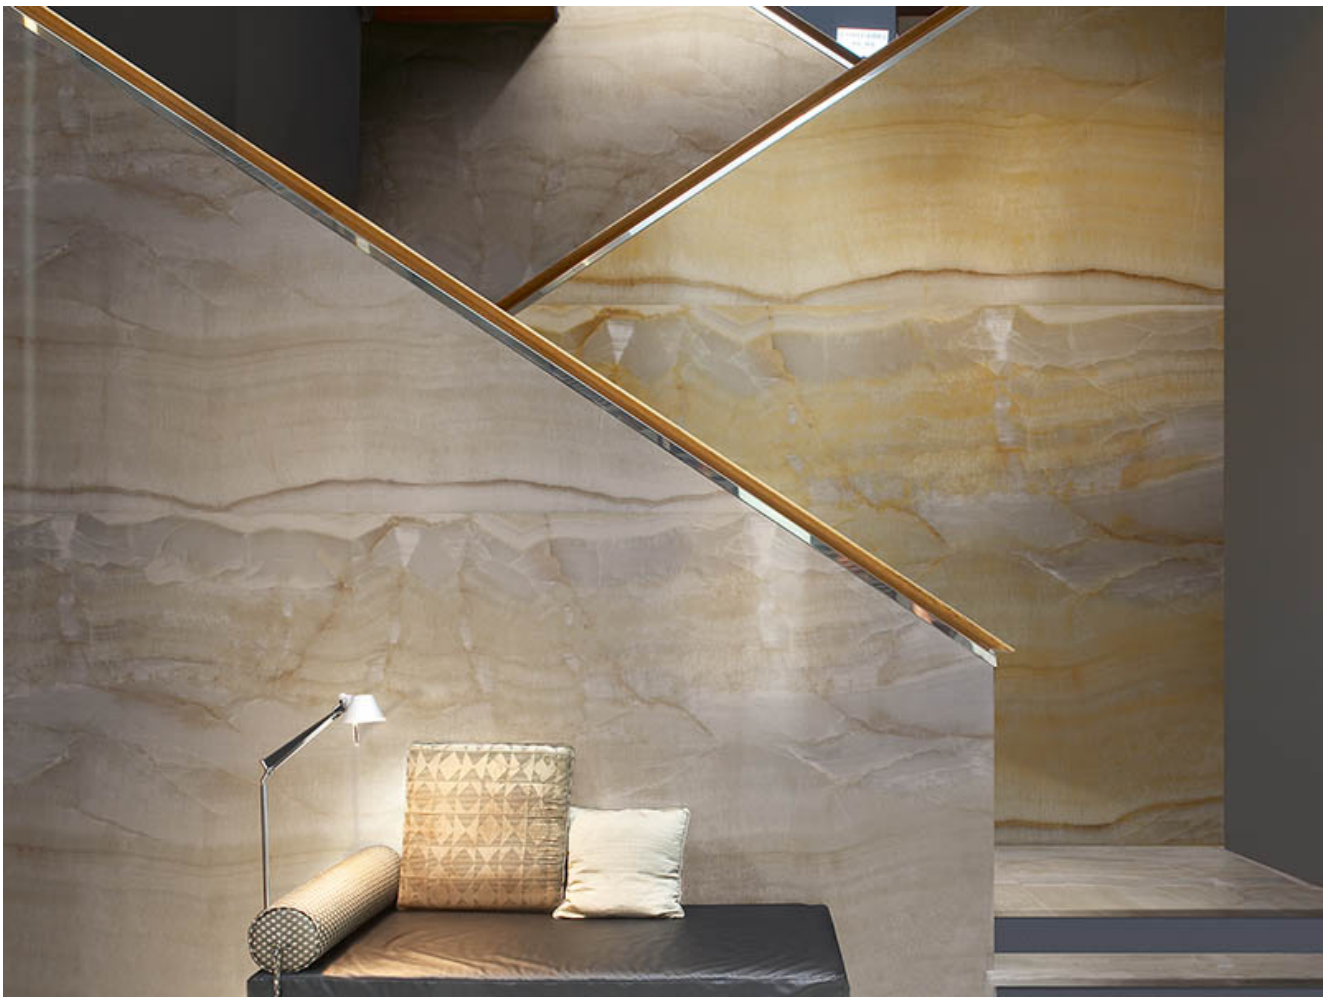


ABSOLUTE ONYX PEARL



ABSOLUTE ONYX PEARL

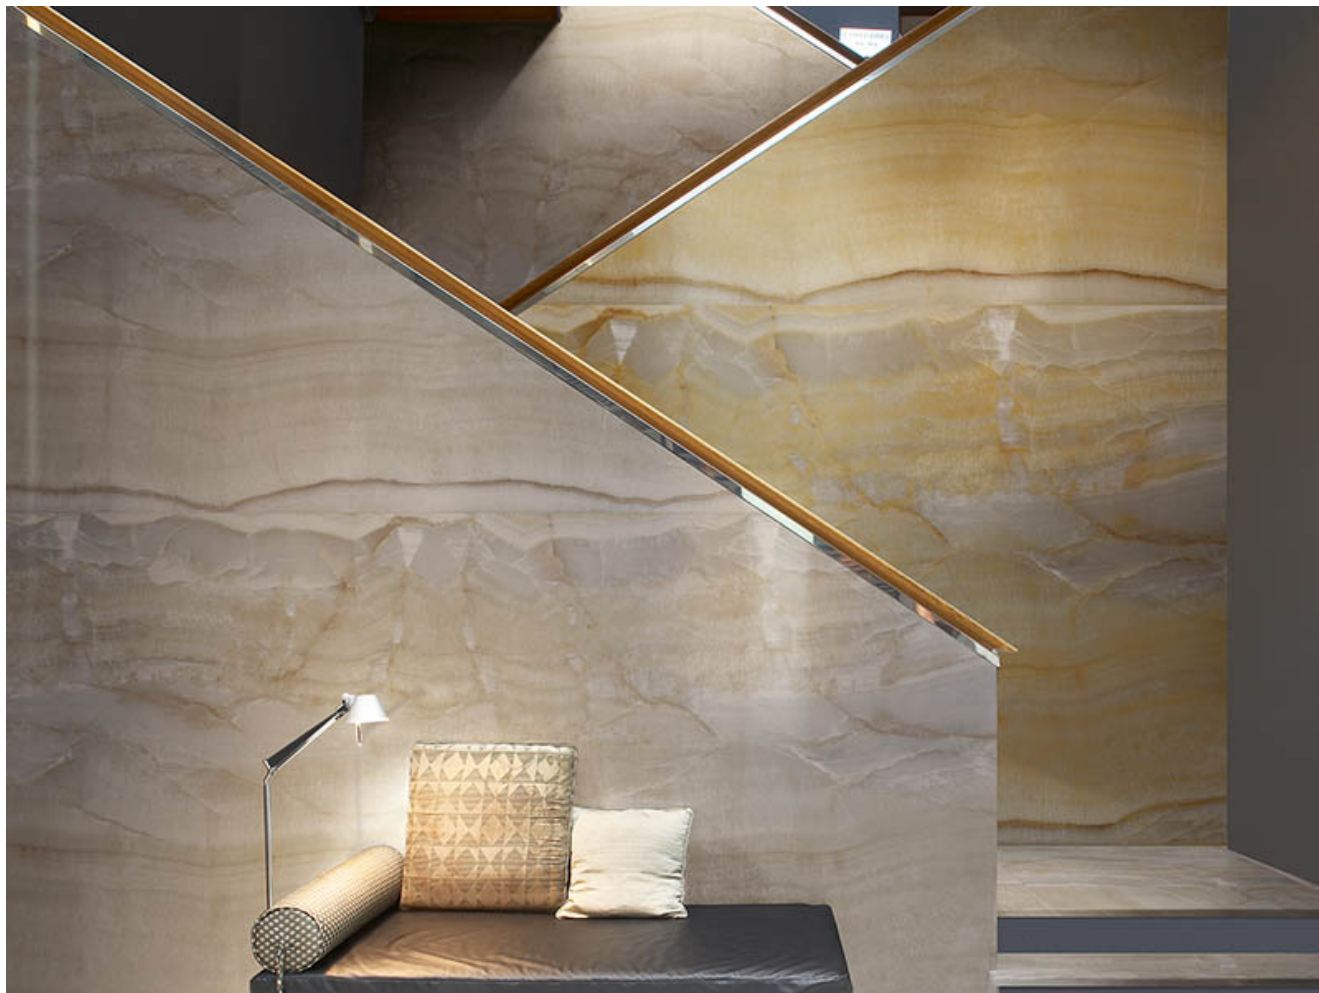

ABSOLUTE ONYX ORO

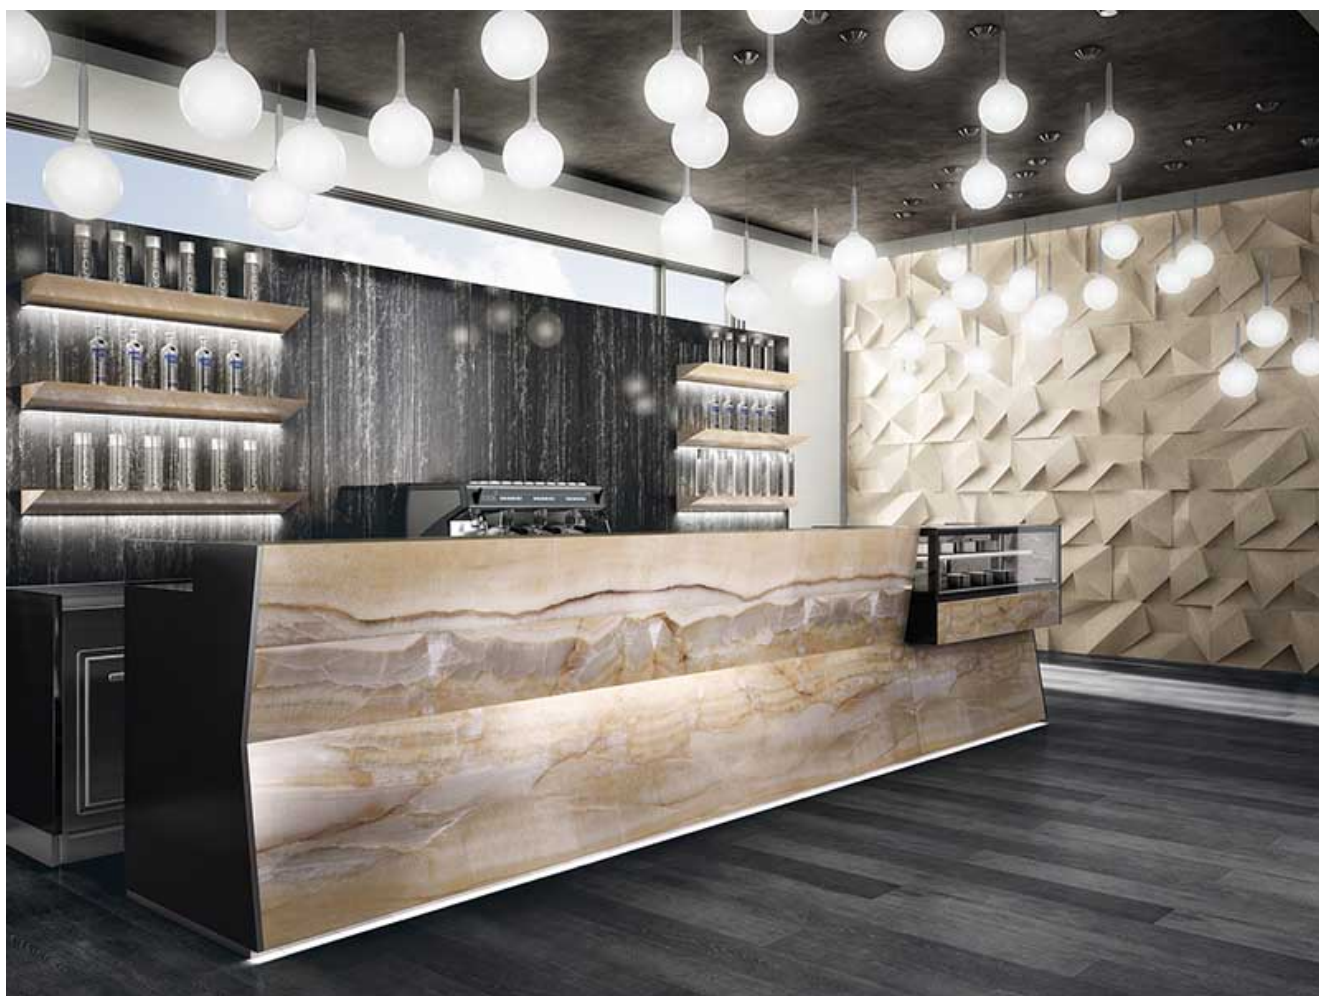

ABSOLUTE ONYX ORO



ABSOLUTE ONYX ORO



ABSOLUTE ONYX ORO

