


*Absolute 10 Onyx*

**COLOURS:**

**FINISHES:**


**SIZES:**



**AMBER**

**POLISHED**

1200 X 600 X 10 MM, 600 X 600 X 10 MM



**GREEN OPAL**

**POLISHED**


1200 X 600 X 10 MM, 600 X 600 X 10 MM



**ICE**

**POLISHED**


1200 X 600 X 10 MM, 600 X 600 X 10 MM



**REAL**

**POLISHED**


1200 X 600 X 10 MM, 600 X 600 X 10 MM



**RIAJ**

**POLISHED**

1200 X 600 X 10 MM, 600 X 600 X 10 MM



ROSE

POLISHED

1200 X 600 X 10 MM, 600 X 600 X 10 MM

### SLIP RESISTANCE

Any queries about slip resistance please contact us.

|          |         |
|----------|---------|
| PTV      |         |
| 96       | 96      |
| Rubber   | Rubber  |
| Wet Dry  | Wet Dry |
| R Rating |         |

### APPLICATION

Absolute 10 Onyx is suitable for:

|                                                                                                     |                                                                                                 |                                                                                                  |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|
| <br>Heavy Footfall | <br>Interior | <br>Mosaics   |
| <br>Skirting       | <br>Stairs   | <br>Wet Areas |

**KINORIGO**®AORAORAORAOR AOR  
Polished

### ORDER A FREE SAMPLE

+44(0) 24 7642 2580

Request 100 X 100 sample

design@kinorigo.com

Colour representations on this sheet may not be exact.  
Take care when choosing your tiles, make sure you order a sample

### Technical Specifications

|                         | Norm            | Average value         |
|-------------------------|-----------------|-----------------------|
| Water absorbtion        | EN ISO 10545_3  | <0,06%                |
| Flexular strength (MOR) | EN ISO 10545_4  | >45 N/mm <sup>2</sup> |
| Breaking strength       | EN ISO 10545_4  | 2500 N                |
| Abrasion Resistance     | EN ISO 10545_6  | <142mm <sup>3</sup>   |
| Frost resistance        | EN ISO 10545_12 | YES                   |

|                  |                 |                                             |
|------------------|-----------------|---------------------------------------------|
| Slip resistance  | DIN 51130       | It can vary according to the surface finish |
| Stain resistance | EN ISO 10545_14 | YES                                         |

Packaging Information

| Finish   | Size              | Pieces/box | Weight/box | Sqm/box | Boxes/pallet | Weight/pallet | Sqm/pallet |
|----------|-------------------|------------|------------|---------|--------------|---------------|------------|
| Polished | 1200 x 600 x 10mm | 2          | 29,52      | 1,42    | 25           | 738           | 36         |
| Polished | 600 x 600 x 10mm  | 3          | 22,46      | 1,08    | 32           | 718,72        | 34,56      |



ABSOLUTE 10 ONYX AMBER



ABSOLUTE 10 ONYX AMBER



ABSOLUTE 10 ONYX AMBER



ABSOLUTE 10 ONYX GREEN-OPAL



ABSOLUTE 10 ONYX GREEN-OPAL



ABSOLUTE 10 ONYX ICE



ABSOLUTE 10 ONYX ICE



ABSOLUTE 10 ONYX ICE



ABSOLUTE 10 ONYX REAL



ABSOLUTE 10 ONYX REAL



ABSOLUTE 10 ONYX REAL



ABSOLUTE 10 ONYX REAL



ABSOLUTE 10 ONYX RIAJ



ABSOLUTE 10 ONYX RIAJ




ABSOLUTE 10 ONYX RIAJ



ABSOLUTE 10 ONYX ROSE



ABSOLUTE 10 ONYX ROSE

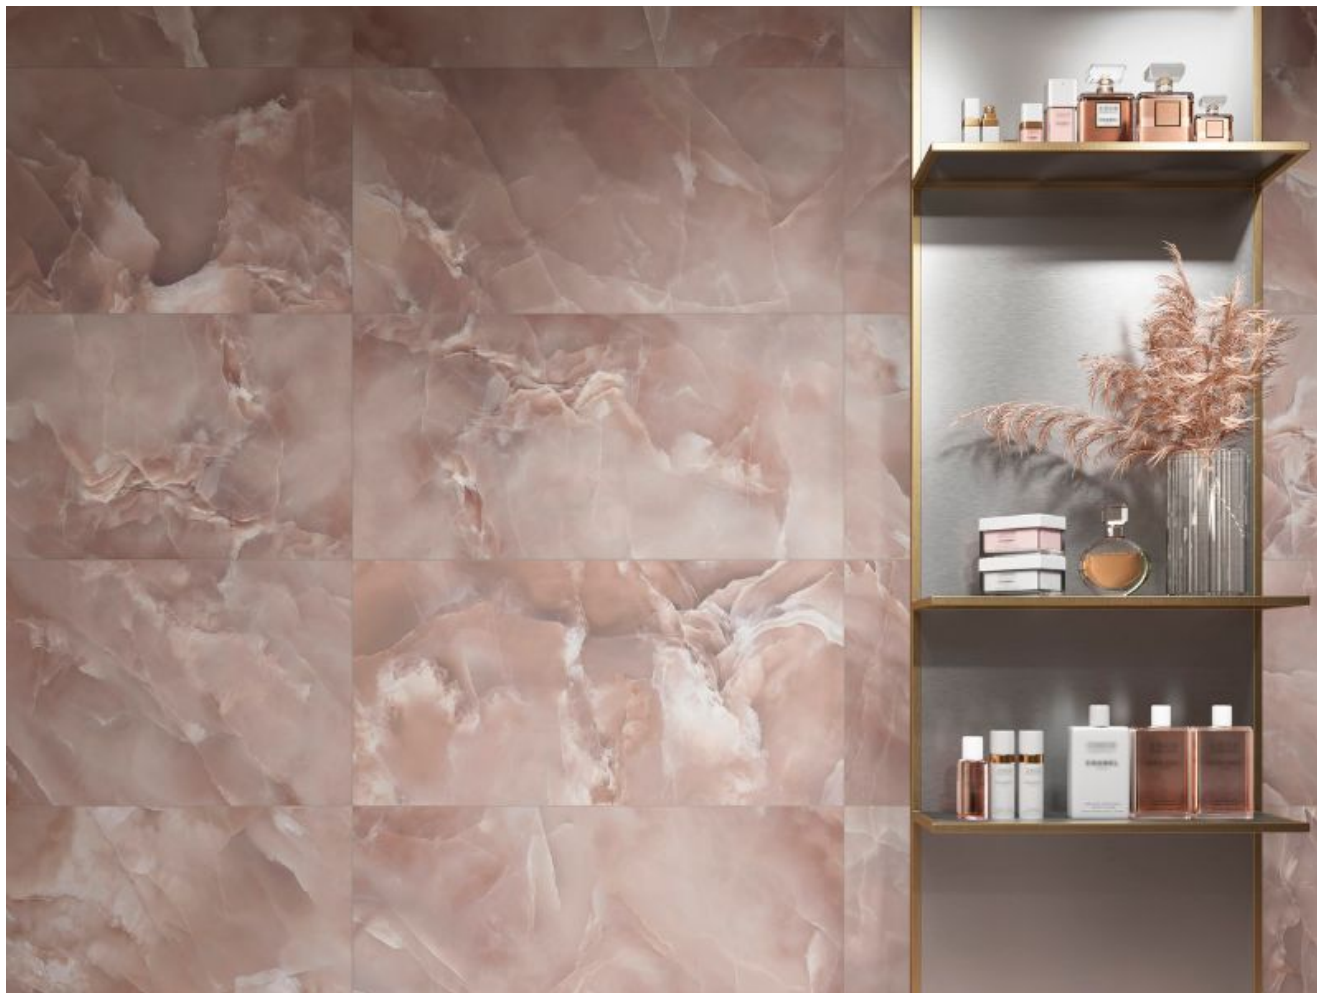

ABSOLUTE 10 ONYX ROSE