

PORCELAIN

# KINORIGO®


## *Arona 20 Mm*

TECHNICAL SHEET

### COLOURS:



**CLAY**



**CREAM**



**DOVE**



**GREY**



**SLATE**

### FINISHES:

**GRIP**

### SIZES:

1200 X 600 X 20MM

1200 X 600 X 20MM

1200 X 600 X 20MM

1200 X 600 X 20MM

1200 X 600 X 20MM

## SLIP RESISTANCE

Any queries about slip resistance please contact us.

PTV

96 Rubber

55 Rubber

Wet Dry Wet Dry R Rating

Grip AOR AOR AOR AOR R11 A+B+C

## APPLICATION

Arona 20mm is suitable for:



Exterior



Heavy Footfall



Wet Areas

## ORDER A FREE SAMPLE

+44(0) 24 7642 2580

Request 100 X 100 sample

design@kinorigo.com

Colour representations on this sheet may not be exact.  
Take care when choosing your tiles, make sure you order a sample

## Technical Specifications

|                         | Norm            | Average value        |
|-------------------------|-----------------|----------------------|
| Water absorbtion        | EN ISO 10545_3  | 0.05%                |
| Abrasion resistance     | EN ISO 10545_6  | 145mm <sup>3</sup>   |
| Flexular strength (MOR) | EN ISO 10545_4  | 50 N/mm <sup>2</sup> |
| Breaking strength       | EN ISO 10545_4  | 13600 N              |
| Slip resistance         | DIN 51130       | R11 A+B+C            |
| Frost resistance        | EN ISO 10545_12 | YES                  |
| Stain resistance        | EN ISO 10545_14 | YES                  |

## Packaging Information

| Finish | Size              | Pieces/box | Weight/box | Sqm/box | Boxes/pallet | Weight/pallet | Sqm/pallet |
|--------|-------------------|------------|------------|---------|--------------|---------------|------------|
| Grip   | 1200 x 600 x 20mm | 1          | 32,5       | 0,72    | 32           | 1040          | 23,04      |



ARONA 20MM CLAY




ARONA 20MM CREAM



ARONA 20MM CREAM



ARONA 20MM DOVE

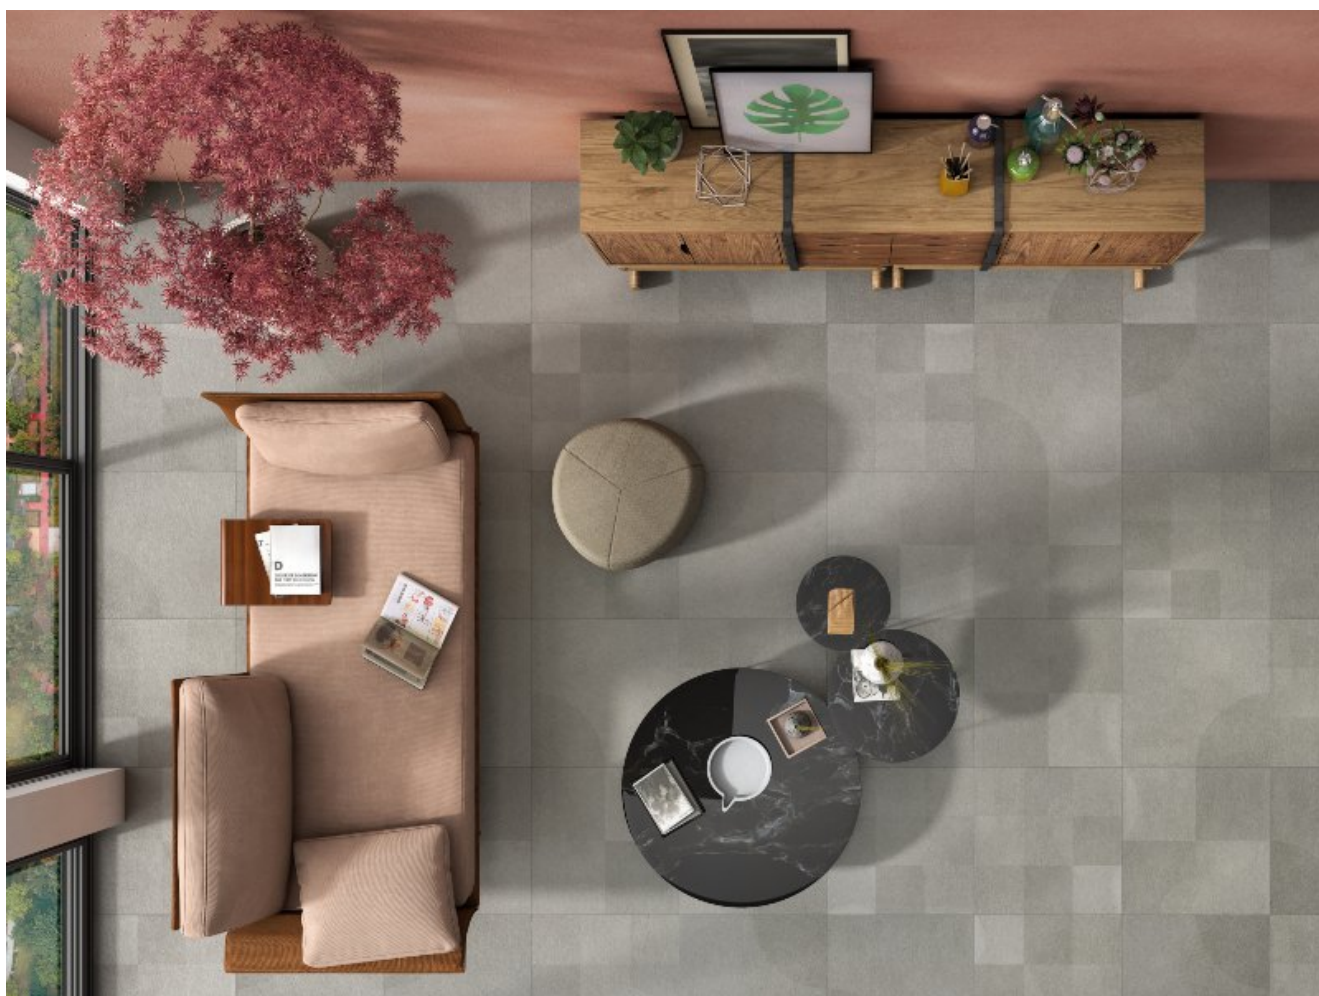

ARONA 20MM GREY



ARONA 20MM SLATE

**KINORIGO®**  
live.design.

+44(0) 24 7642 2580    [design@kinorigo.com](mailto:design@kinorigo.com)